DO DON'S DOTIDITO 1 2 MAY 2001

				RECUTONIO TO MON SOON		
FORM (REV <sub>a</sub> l	PTO-139 1-2000)	00 (Modified) U.S. DEPARTMENT OF COMMERCE PA	TENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER		
		RANSMITTAL LETTER TO THE U	NITED STATES	215976US2XPCT		
		DESIGNATED/ELECTED OFFICE	U.S APPLICATION NO OF KNOWN SEE 37 CFR			
, ag		CONCERNING A FILING UNDER	35 U.S.C. 371	09/920424		
INTE			NAL FILING DATE	PRIORITY DATE CLAIMED		
TITL		PCT/FR00/01232 NVENTION	5 May 2000	11 May 1999		
SYS	TEM	FOR PROCESSING DATA FOR DISPL	AY ON A MATRIX SCR	REEN		
t .		T(S) FOR DO/EO/US				
FAV	OT.	Jean-Jacques et al.				
Appl	icant l	nerewith submits to the United States Designated/	Elected Office (DO/EO/US)	the following items and other information:		
1.	$\boxtimes$	This is a FIRST submission of items concerning	g a filing under 35 U.S.C. 37	1.		
2.		This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submiss	ion of items concerning a fili	ing under 35 U.S.C. 371.		
3.	$\boxtimes$	This is an express request to begin national exam (6), (9) and (24) indicated below.	nination procedures (35 U.S.	C. 371(f)). The submission must include itens (5),		
4.	$\boxtimes$	The US has been elected by the expiration of 19	months from the priority dat	te (Article 31).		
5.	$\boxtimes$	A copy of the International Application as filed	(35 U.S.C. 371 (c) (2))			
THE ST		a.   is attached hereto (required only if not	communicated by the Intern	ational Bureau).		
Total		b. 🛮 has been communicated by the Internal	ional Bureau.			
A CONTRACTOR		c. $\square$ is not required, as the application was f	iled in the United States Rec	eiving Office (RO/US).		
6.	$\boxtimes$	An English language translation of the Internation	onal Application as filed (35	U.S.C. 371(c)(2)).		
		a. 🛛 is attached hereto.				
		b.  has been previously submitted under 3:	5 U.S.C. 154(d)(4).			
was one was one for the same time	$\boxtimes$	Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))  a.   are attached hereto (required only if not communicated by the International Bureau).  b.   have been communicated by the International Bureau.				
=#:						
nib		c. $\square$ have not been made; however, the time	limit for making such amend	dments has NOT expired.		
nagin E		d. 🛚 have not been made and will not be ma	de.			
8. 9.		An English language translation of the amendme	nts to the claims under PCT	Article 19 (35 U.S.C. 371(c)(3)).		
9.	$\boxtimes$	An oath or declaration of the inventor(s) (35 U.S.	.C. 371 (c)(4)).			
10.		An English language translation of the annexes t Article 36 (35 U.S.C. 371 (c)(5)).	o the International Prelimina	ry Examination Report under PCT		
11.	$\boxtimes$	A copy of the International Preliminary Examina	tion Report (PCT/IPEA/409	).		
12.	$\boxtimes$	A copy of the International Search Report (PCT/	ISA/210).			
It	ems 1	3 to 20 below concern document(s) or informat	ion included:			
13.		An Information Disclosure Statement under 37 (				
14.		An assignment document for recording. A separ		e with 37 CFR 3.28 and 3.31 is included.		
15.	$\boxtimes$	A FIRST preliminary amendment.	<b>,</b>			
16.		A SECOND or SUBSEQUENT preliminary am	endment.			
17.		A substitute specification.				
18.		A change of power of attorney and/or address let	ter.			
19.		A computer-readable form of the sequence listing		ale 13ter.2 and 35 U.S.C. 1.821 - 1.825.		
20.		A second copy of the published international app				
21.		A second copy of the English language translatio				
22.		Certificate of Mailing by Express Mail				
23.	$\boxtimes$	Other items or information:				
		Request for Consideration of Documents Cited PCT/IB/304/Drawings (7 Sheets)/PCT/IB/308	l in International Search R	Report/Request for Priority		

U.S. APPLICATION	VNO (TROCK OF 19 17 CFR	PCT/FR00/012			US2XPCT
24. The fo	ollowing fees are submitted:.			CALCULATIONS	S PTO USE ONLY
☐ Neither int	AL FEE ( 37 CFR 1.492 (a) (1) - ernational preliminary examination al search fee (37 CFR 1.445(a)(2)) ational Search Report not prepared	n fee (37 CFR 1.482) nor paid to USPTO	\$1040.00		
☑ Internation	al preliminary examination fee (37 t International Search Report prepare	CFR 1.482) not paid to ared by the EPO or JPO	\$890.00		
☐ Internation but interna	al preliminary examination fee (37 tional search fee (37 CFR 1.445(a)	CFR 1.482) not paid to USPT (2)) paid to USPT (	0		
but all clain	al preliminary examination fee (37 ms did not satisfy provisions of PC	T Article $33(1)$ -(4)	\$710.00		
☐ Internation and all clai	al preliminary examination fee (37 ms satisfied provisions of PCT Ar	ticle 33(1)-(4)	\$100.00		
		ATE BASIC FEE AM		\$890.00	
Surcharge of \$130 months from the e	.00 for furnishing the oath or deck arliest claimed priority date (37 C	FR 1.492 (e)).	20 🗆 30	\$0.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	50.00	
Total claims	10 - 20 =	0	x \$18.00	\$0.00	
Independent claim		0	x \$84.00	\$0.00 \$0.00	
	nt Claims (check if applicable).	ABOVE CALCULA		\$890.00	
Applicant clareduced by 1	aims small entity status. See 37 CF			\$0.00	
		SUB	TOTAL =	\$890.00	
Processing fee of	\$130.00 for furnishing the English arliest claimed priority date (37 C	translation later than	20 🗆 30 +	\$0.00	
		TOTAL NATIONA	L FEE =	\$890.00	
Fee for recording accompanied by a	the enclosed assignment (37 CFR) in appropriate cover sheet (37 CFR)	1.21(h)). The assignment must 3.28, 3.31) (check if application	be ole).	\$0.00	
ed t		TOTAL FEES ENCI	LOSED =	\$890.00	
ļak				Amount to be: refunded	S
				charged	\$
jiria —	check in the amount of \$890				
Α	ease charge my Deposit Account N duplicate copy of this sheet is encl	osed.			
	e Commissioner is hereby authoriz Deposit Account No. 15-003				overpayment
d. 🗌 Fe int	es are to be charged to a credit card formation should not be included	d. WARNING: Information on ton this form. Provide credit of	this form may be ard information a	come public. Credit on authorization on P	<b>card</b> TO-2038.
NOTE: Where a 1.137(a) or (b)) n	n appropriate time limit under 3 nust be filed and granted to resto	7 CFR 1.494 or 1.495 has not re the application to pending	status.		TR .
SEND ALL COR	RESPONDENCE TO:		la de la companya de	vel forhas	
			SIGNATURE	, and the second	
			Marvin J. S	pivak	
			NAME		
			24,913		
	22850			ION NUMBER	
		9	Nou.	13 2001	
	Surinder S Registration N	achar Io. 34,423	DATE		

#### IN THE UNITED STATES PATENT & TRADEMARK OFFICE

IN RE APPLICATION OF

:

JEAN-JACQUES FAVOT ET AL

: ATTN: APPLICATION DIVISION

SERIAL NO: NEW U.S. PCT APPLN

(Based on PCT/FR00/01232

FILED: HEREWITH

:

FOR: SYSTEM FOR PROCESSING

DATA FOR DISPLAY ON A

MATRIX SCREEN

#### PRELIMINARY AMENDMENT

ASSISTANT COMMISSIONER FOR PATENTS WASHINGTON, D.C. 20231

SIR:

Prior to a first examination on the merits, please amend the above-identified application as follows:

#### IN THE SPECIFICATION

Page 2, beginning at line 17, bridging page 3, line 1, please delete the paragraph and replace it with the following paragraph:

In the patent filed on 28 August 1987 under No. 87 12 039 and granted on 29 April 1994 under No. 2 619 982, corresponding to U.S. 5,150,105, the company THOMSON-CSF proposed a solution to this problem, consisting in using a set of subpixels, dubbed a microregion as it is widely known, to represent each dot. The distribution of the luminances and chrominances of the subpixels within these microregions obeys a law which is variable as a function of the result to be obtained and which makes it possible to alleviate the various

drawbacks mentioned above. For example the representation of a stroke will correspond to a distribution of the luminance having the shape of a Gaussian in a direction transverse to this stroke, and this will give the desired thickness for good visibility and will "erase" the staircase effects. Numerous distribution laws which make it possible to tackle most of the situations encountered are currently known. In this basic patent, the processing corresponding to the use of these microregions, often referred to as filtering, is performed in a processing unit known as a "UMIP", standing for microregion unit, placed between the pixel memory and the matrix screen. This implies that the digital processing is performed on all the pixels, thus requiring particularly considerable computational power.

Page 3, at lines 4-17, please delete the paragraph and replace it with the following paragraph:

In a French patent application filed on 23 August 1990 under No. 90 10587, published on 3 February 1995 under No. 2 666 165, and granted via the European channel on 26 April 1995 under No. 0472463, and corresponding to U.S. 5,287,451, the company SEXTANT Avionique proposed that the processing defining the microregions be performed by placing the UMIP performing this processing ahead of the image memory. The throughput of the processing in this UMIP is thus much lower, since it corresponds only to the dot actually displayed, but on the other hand the size of the image memory must be much larger, since it is necessary to store n times the set of pixels of the screen, n being equal to the number of pixels contained in a microregion.

#### IN THE CLAIMS

Please cancel Claims 1-4 without prejudice.

Please add new Claims 5-14 as follows:

5. (New) System for displaying an image on a screen formed of a matrix of pixels each including a given number of subpixels with primary colors, comprising a symbol generator which delivers information characteristic of dots of the image to be displayed and is connected to an image memory which is itself connected to a correlator, the correlator configured to determine a luminous level of each pixel or subpixel of the screen by a processing using a filter, dubbed microregion, comprising a given number PxQ of luminous weighting coefficients applied to a set of PxQ pixels of subpixels around said pixel or subpixel to be processed, wherein

the image memory is organized to allow reading of n pixel or subpixels in parallel, n greater or equal to two,

the correlator comprises a luminance path which performs a synchronous processing in parallel of the luminous levels of the n pixels or subpixels by selecting a microregion, for each pixel or subpixel, and by combining, at a given instant, the luminous weighting coefficients of the n microregions selected for each of the n pixels or subpixels, with the coefficients already contained in the correlator and originating from successive correlations of the coefficients of all the microregions previously selected.

- 6. (New) System according to Claim 5, wherein the selecting of a microregion, for each pixel or subpixel, is undertaken as a function of the position determined by the generator of the dot of the image to be displayed in the pixel or subpixel.
- 7. (New) System according to Claim 5, wherein the symbol generator determines a color of the dot of the image to be represented in a form of a color code and generates an attribute making it possible to attribute the color to a stroke element or to a background element, and the correlator furthermore comprises a stroke color path and a background color path, allowing the synchronous and simultaneous processing of the color of the n pixels or

subpixels either by the stroke color path, or by the background color path, as a function of the attribute.

- 8. (New) System according to Claim 7, wherein the stroke color path is connected to the luminance path in such a way as to manage intersections and superpositions of strokes of different colors, as a function of predetermined color priority codes.
- 9. (New) System according to claim 5, wherein the luminance path and chrominance path of the correlator are formed by a union of independent lines, and a link between the lines for taking into account relations between the pixels or subpixels in a vertical direction is effected by reinjecting into a given line content of data emanating from an adjacent line.
- 10. (New) System according to Claim 7, wherein the correlator further comprises a stroke color generator and a background color generator configured to transform the colors of the stroke color path and of the background color path, delivered in a form of codes, into red, green, blue intensity levels, and a mixer for combining in parallel for the n pixels or subpixels to be processed, the outgoing data of the luminance path, of the stroke color generator, of the background color generator, to construct pixels or subpixels actually intended for display in the matrix display.
- 11. (New) System according to Claim 10, wherein the mixer comprises a first function of performing for the n pixels or subpixels products of brightness levels emanating from the luminance correlator times the red, green, blue intensity levels.
- 12. (New) System according to Claim 11, wherein the mixer comprises a second function of managing for the n pixels or subpixels inlaying of stroke elements into a background of a same color by performing an outlining function.

- 13. (New) System according to claim 5 for the parallel processing of two pixels or subpixels, wherein the processing uses 16 microregions corresponding to a processing whose fineness is a quarter of a pixel.
- 14. (New) System according to Claim 13, wherein each microregion comprises 4X4 coefficients and each coefficient exhibits 8 possible luminous levels.

#### IN THE ABSTRACT OF THE DISCLOSURE

Please cancel the Abstract page 22 in its entirety and insert the following new Abstract therefor:

### ABSTRACT OF THE DISCLOSURE

System for processing data for display on a matrix screen. The system uses an image memory in which n pixels are read in parallel so as subsequently to be able to process them in parallel in a microregion unit. That makes it possible to retain an image memory of reasonable size while limiting the throughput of the microregion unit.

#### **REMARKS**

Favorable consideration of this application, as presently amended, is respectfully requested.

The present Preliminary Amendment is submitted to place the above-identified application in more proper format under United States practice. By the present Preliminary Amendment the specification has been amended to update the U.S. patent status of certain references recited in the background section.

Original Claims 1-4 are cancelled and new Claims 5-14 are presented for examination. New Claims 5-14 are deemed to be self-evident from the original disclosure, including original Claims 1-4, and thus are not deemed to raise any issues of new matter. Any differences between new Claims 5-14 and original Claims 1-4 are deemed to at most broaden the scope of new Claims 5-14.

A new Abstract believed to be in more proper format under United States practice is also submitted herein.

The present application is believed to be in condition for a full and thorough examination on the merits. An early and favorable consideration of the present application is hereby respectfully requested.

Respectfully submitted,

OBLON, SPIVAK, McCLELLAND, MAIER & NEUSTADT, P.C.

Gregory J. Maier

Registration No. 25,599

fund Sachar

Attorney of Record

Surinder Sachar

Registration No. 34,423

22850

Crystal Square Five - Fourth Floor 1755 Jefferson Davis Highway Arlington, Virginia 22202 (703) 413-3000

Fax #: (703)413-2220

GJM:SNS/rac

I:\atty\SNS\215976US-PR.wpd

Marked-Up Copy
Serial No:

Amendment Filed on:

| 11~13~01

#### IN THE SPECIFICATION

Page 2, beginning at line 17, bridging page 3, line 1, please delete the paragraph and replace it with the following paragraph:

--In the patent filed on 28 August 1987 under No. 87 12 039 and granted on 29 April 1994 under No. 2 619 982, corresponding to U.S. 5,150,105, the company THOMSON-CSF proposed a solution to this problem, consisting in using a set of subpixels, dubbed a microregion as it is widely known, to represent each dot. The distribution of the luminances and chrominances of the subpixels within these microregions obeys a law which is variable as a function of the result to be obtained and which makes it possible to alleviate the various drawbacks mentioned above. For example the representation of a stroke will correspond to a distribution of the luminance having the shape of a Gaussian in a direction transverse to this stroke, and this will give the desired thickness for good visibility and will "erase" the staircase effects. Numerous distribution laws which make it possible to tackle most of the situations encountered are currently known. In this basic patent, the processing corresponding to the use of these microregions, often referred to as filtering, is performed in a processing unit known as a "UMIP", standing for microregion unit, placed between the pixel memory and the matrix screen. This implies that the digital processing is performed on all the pixels, thus requiring particularly considerable computational power.

Page 3, at lines 4-17, please delete the paragraph and replace it with the following paragraph:

In a French patent application filed on 23 August 1990 under No. 90 10587, published on 3 February 1995 under No. 2 666 165, and granted via the European channel on [26.04.1995] 26 April 1995 under No. 0472463, and corresponding to U.S. 5,287,451, the company SEXTANT Avionique proposed that the processing defining the microregions be performed by placing the UMIP performing this processing ahead of the image memory. The throughput of the processing in this UMIP is thus much lower, since it corresponds only to the dot actually displayed, but on the other hand the size of the image memory must be much larger, since it is necessary to store n times the set of pixels of the screen, n being equal to the number of pixels contained in a microregion.

#### IN THE CLAIMS

Claims 1-4 (Canceled).

Claims 5-14 (New) .--

#### IN THE ABSTRACT

(New).

# 7/PRTS

# SYSTEM FOR PROCESSING DATA FOR DISPLAY ON A MATRIX SCREEN

The present invention relates to a system for processing data for display on a matrix screen. It applies more particularly to the displaying on a liquid crystal screen of the symbolic representations relating to the parameters for aiding the piloting and navigation of an aircraft.

10

20

25

30

The various mechanical or electromechanical instruments intended for advising the pilot of an aircraft as to the behaviour of the latter, its position in space, the course to be followed, engine monitoring etc., have long since been begun to be replaced by visualization systems on which these indications are displayed in a synthetic manner. In particular, this allows progress towards ever more symbolic representation of these various parameters, thus affording the pilot a much more vivid and hence much more directly meaningful representation of the situation encountered. hardware used initially comprised cathode-ray tubes on which the display was undertaken in so-called "bird's Technical eye" mode. progress has led replacement of these tubes by flat screens, generally liquid crystal screens, the matrix control of which "television" scan type pictorialization. Eurthermore these liquid crystal screens allow colour visualization, which is universally used nowadays and which requires a particular addressing of the primary colour subpixels forming the coloured pixels proper.

The digital processing of the various data originating from the sensors, making it possible to define the symbols displayed on the screen, quite naturally leads to the obtaining of display data in a vector form which is particularly suited to "bird's eye" scanning. Television scanning is achieved in a well known manner by determining in a processor the values of the

25

30

35

luminance and of the chrominance of each pixel of the matrixwise controlled screen. These values are stored in a random access memory, so as to follow the data stream corresponding to the bird's eye display. This memory is subsequently read sequentially to achieve television display. In fact, two memories are used, written and then read alternately so as to ease their management.

10 The transformation system thus briefly described exhibits various drawbacks. More particularly the strokes represented by alignments of pixels are too small to be viewed properly, the oblique strokes form staircases, and the colours at the points where several strokes cross blend to give false colours.

In a patent filed on 28 August 1987 under No. 87 12 039 and granted on 29 April 1994 under No. 2 619 982, the THOMSON-CSF proposed a solution this to company problem, consisting in using a set of subpixels, dubbed a microregion as it is widely known, to represent each distribution of the The luminances chrominances of the subpixels within these microregions obeys a law which is variable as a function of the result to be obtained and which makes it possible to alleviate the various drawbacks mentioned above. For example the representation of a stroke will correspond to a distribution of the luminance having the shape of a Gaussian in a direction transverse to this stroke, and this will give the desired thickness for good visibility and will "erase" the staircase effects. Numerous distribution laws which make it possible to tackle most of the situations encountered are currently this basic In patent, the processing known. corresponding to the use of these microregions, often referred to as filtering, is performed in a processing unit known as a "UMIP", standing for microregion unit, placed between the pixel memory and the matrix screen. This implies that the digital processing is performed on all the pixels, thus requiring particularly considerable computational power.

In a French patent application filed on 23 August 1990 under No. 90 10587, published on 3 February 1995 under No. 2 666 165, and granted via the European channel on 26.04.1995 under No. 0472463, the company Avionique proposed that the processing defining the placing microregions be performed by the UMIP performing this processing ahead of the image memory. 10 The throughput of the processing in this UMIP is thus much lower, since it corresponds only to the dot actually displayed, but on the other hand the size of the image memory must be much larger, since it is necessary to store n times the set of pixels of the screen, n being equal to the number of pixels contained in a microregion.

It will be noted in passing that all these systems,

20 both those of the prior art and that of the invention,
apply equally to the processing of pixels as to that of
subpixels. The choice between the processing level is
made essentially as a function of the nature of the
display screen used, which may allow either global

25 processing as in the case of "STRIPE" type displays, or
which requires processing at the subpixel level as in
the case of "QUAD" type displays.

Therefore, in the standard case of a microregion composed of 4×4=16 pixels the volume of the memory is multiplied by 16. Such a memory is technically realizable but it has a prohibitive volume and a prohibitive cost.

In a patent application filed on 21 December 1995 under No. 95 15 261 and granted on 6 February 1998 under No. 2 742 899, the company SEXTANT Avionique proposed an improvement to the previous system consisting in inserting between the UMIP and the image memory a

device substantially equivalent to a cache memory, which makes it possible to limit the matrix aspect due to the microregions to a single dimension, transverse or vertical. The volume of the image memory is thus partially limited, but one introduces the need to empty the cache memory regularly when it is full, this requiring that the processing be stopped during this time and entailing a reduction in the processing capacity of the graphics generator.

10

15

20

To alleviate these drawbacks, the invention proposes a system for processing data for display on a matrix screen, of the type comprising a symbol generator connected to an image memory itself connected to a correlator making it possible to implement a processing based on microregions so as to generate the final image to be displayed on a matrix screen, mainly characterized in that the image memory is organized so as to be able to read n pixels in parallel and in that the correlator is organized so as to process these n pixels in parallel.

According to another characteristic, the correlator is divided into two parts making it possible to process the luminance and the chrominance separately so as to make it possible to perform a hierarchical processing of the colours.

According to another characteristic, it comprises means for separately processing the colour of the strokes and the colour of the background, and a mixer for making it possible to outline the elements of scenery displayed on the background in tone on tone mode.

According to another characteristic, the correlator is organized in m substantially identical parallel lines making it possible for the m pixels of one of the axes of the microregions used to be processed in parallel.

Other features and advantages of the invention will become clearly apparent in the following description presented by way of nonlimiting example with regard to the appended figures which represent:

5

- Figure 1, a general schematic diagram of the system according to the invention;
- Figure 2, the timing diagram for the operation of a system according to the invention;
- Figure 3, a schematic diagram of a correlator intended for a system according to the invention;
  - Figure 4, an example of tables of filters intended to be implemented in a system according to the invention,
  - Figure 5, a detailed schematic diagram of a subset of the correlator 303 of Figure 3;
  - Figures 6a and 6b, a complete schematic diagram of this same correlator;
  - Figures 7 and 8, illustrations of the luminance chrominance product at the output of the system according to the invention; and
  - Figure 9, a schematic diagram of a mixer making it possible to perform the processing illustrated in Figures 7 and 8.

25

30

35

15

20

The invention therefore proposes to place the UMIP between the image memory and the matrix screen, this corresponding to the basic structure described in the first patent cited above. The volume of the memory is then strictly limited to the quantity required to represent the set of pixels and subpixels of this matrix screen, thereby very substantially limiting the volume and cost thereof. To be able nevertheless to obtain the high capacity to draw tracks with a sufficiently small throughput, the processing between the memory and the UMIP is performed in parallel on n pixels or subpixels. The number of dots processed per cycle is thus multiplied by n and the throughput of the

UMIP, for the same display capacity, is itself multiplied by n.

In the exemplary embodiment described below, we confine ourselves to a device making it possible to process the subpixels of the display two by two using microregions of size 4 by 4. This example corresponds to standard practice with regard to the size of the microregions, in conjunction with the use of a QUAD type display, which imposes processing at the subpixel level.

Represented in Figure 1 is a general schematic of a system according to the invention.

This system therefore comprises a symbol generator 101, known in the art, which makes it possible to obtain the values of the positions and of the chrominances of the various subpixels intended to represent the symbols which will ultimately be displayed on a display screen 102 of the LCD type.

The data thus obtained from the generator 101 are stored in an image memory 103. This memory is of the double page type, each page of which possesses a capacity at least equal to the number of subpixels of the display 102.

This double-page organization makes it possible, in a known manner, to simultaneously write to a page from the symbol generator and read from the other page for transmission to the display via processing means of the UMIP type 104.

According to the invention, the memory 103 is furthermore organized in such a way as to allow simultaneous reading of two subpixels in parallel, it being possible to do this without any particular problem with the means known in the art.

The UMIP 104 comprises on the one hand a correlator 105 having two paths in parallel and on the other hand a sequencer 106.

5 This sequencer makes it possible to manage registering in the memory 103 of the information originating from the symbol generator 101, and on the other hand to synchronize the reading of this memory with the processing in the correlator, as well as the 10 displaying on the screen 102 of the subpixels thus processed. This sequencing is performed according to a timing diagram which is illustrated in Figure 2. The synchronization signal is provided simultaneously to the symbol generator 101, to the image memory 103, to 15 the correlator 105 and to the display 102.

By way of example, the real-time cycle running between two synchronization pulses lasts 16 ms.

- This sequencer is formed of a set of logic circuits operating on the basis of a clock and which are connected so as to deliver, according to Boolean logic for example, the signals required by the various entities to which the sequencer is linked. To obtain the most compact set possible, the sequencer is preferably installed in a known manner in a circuit of the FPGA type.
- According to the invention, the correlator 105 allows the parallel processing of two dots with microregions of size 4×4. This makes it possible to obtain real-time processing corresponding to the rate of display of the subpixels in the display 102.
- 35 The position, determined by the generator 101, in the subpixel of the dot to be displayed makes it possible to determine the filter (type, or profile, of the microregion) to be used to move the luminous dot in this subpixel in such a way as to obtain the desired

effect. To do this, 16 different filters are used, thereby allowing processing whose fineness is 1/4 of a subpixel. The operations for processing the luminance and the chrominance are separate. Colour codes are used to represent the chrominance, this making it possible to manage a priority between these colours when the tracks of two symbols overlap, by displaying for example a red dot at the crossover of a red line and a blue line.

10

15

Furthermore, to be able to make it possible to distinguish symbols whose colour is the same as that of the background, for example a white line on a white background, the correlator performs an outlining of the patterns, consisting for example in edging this white line with two fine black lines.

Represented in Figure 3 is a schematic diagram of the correlator 105.

20

25

30

latter receives as input the values of positions and of the colours (chrominances) of the two subpixels 1 and 2 read in parallel from the memory 103. The values of the positions are applied to identical tables 301 and 302, which contain the values of 16 filters (microregions) used. The values of these filters have been determined, either experimentally or by calculation, so as each to correspond to an offset between the position of the physical subpixel and that of the subpixel drawn, as explained above. For each subpixel, a filter is therefore selected respectively from each table.

Each of these filters contains luminous weighting coefficients of the 4×4 subpixels which make up the microregion corresponding to the filter. In the exemplary embodiment described this number of luminous levels is limited to 8, this being entirely adequate as experience shows. Hence, for each incoming subpixel,

the tables of filters 301 and 302 each make it possible to obtain 16 coefficients of luminous levels each corresponding to one of the subpixels of the microregion.

5

By way of example, represented in Figure 4 is a table of 16 filters each of which is selected as a function of the shifts dx and dy of the subpixel with respect to the luminous centre of the microregion.

10

20

25

These coefficients are then applied to a luminance correlator 303 which will be described later. The values of the colours of the subpixels 1 and 2 are for their part applied to a chrominance correlator 304,

15 itself described later.

The data originating from this chrominance correlator are then applied on the one hand to a stroke colour generator 305 and on the other hand to a background colour generator 306, themselves also described later.

Finally, the outgoing data from the luminance correlator 303 and from the two colour generators 305 and 306 are applied to a mixer 307, itself described later, which ultimately delivers the actual values of the subpixels 1 and 2 to be displayed in the matrix screen 102 to obtain the visualization effect.

The luminance and chrominance correlators 303 and 304 are formed by the union of independent and generic subsets whose number is equal to that of the subpixels contained in the vertical dimension of the microregions. Subsequently in this text we shall refer to these subsets as "lines" since they serve to process the successive subpixels of a display line of the matrix display.

The link between these various lines for taking into account the relations between the subpixels of the

10

15

20

microregions in the vertical direction is effected by way of FIFO type memories placed at the output of the lines and which reinject the content of the outputs into the lines. This aspect of the correlators will be described in relation to the complete schematic represented in Figure 6.

Represented in Figure 5 is the schematic of one of these lines, comprising a correlator for the luminance and a correlator for the chrominance. These correlators essentially use logic functions of the OR, SUP and SUP/ECR type. These functions will be described subsequently in this text. This diagram also comprises D-type flip-flops 504, the well-known role of which is essentially to ensure the link between the other entities while simultaneously affording a memory effect and a delay effect so as to comply with the sequencing required for overall operation. In this schematic diagram, on each occasion just one D-type flip-flop has been represented for the understanding of the manner of operation but there will if required be the necessary number thereof in series so as to obtain proper sequencing.

25 The luminance correlator thus embodied makes it possible at an instant T to combine the coefficients of two new incoming microregions with the coefficients already contained in the correlator and which originate from the successive correlations of the coefficients of 30 all the previous microregions. The values of the coefficients of the microregions immediately preceding those incoming will in the general case be predominant but, as in any correlation, the coefficients of the earlier microregions will have some effect which will 35 wane as they become more remote in time.

The luminance correlator embodied according to this diagram makes it possible to obtain a smoothing effect on the actor elements of the image (the strokes) which

pass through it. On the other hand in this exemplary embodiment the scenery elements of the image (the background) are not smoothed and hence do not pass through the luminance correlator. It would nevertheless be possible, by way of a variant embodiment, to use a second luminance correlator to smooth the elements of the scenery also.

The chrominance correlator, as embodied in this exemplary embodiment, comprises two paths which allow independent processing of the actor elements of the image and the background scenery elements, as defined above. To do this, each incoming subpixel comprises an attribute, generated at the level of the symbol generator 101, which makes it possible to route the corresponding information towards the stroke path or towards the background path. This attribute also makes it possible to route the subpixels corresponding to the scenery elements towards the luminance path.

20

25

30

35

10

15

The data corresponding to the colours, computed in the symbol generator, are so in the form of colour codes which are hierarchized. This makes it possible to obtain priority in the display of certain colours, so as on the one hand not to have a blend of colours giving an erratic result, and on the other hand to allow through certain priority information. regard reference may be made to the example given above of the crossing of a red stroke and a blue stroke. For this, the stroke colour path is connected to the luminance path in such a way as to correctly manage the intersections and the superpositions of strokes of different colours, which therefore comprise different levels of priorities on display. This hierarchy is obtained in the diagram with the aid of the SUP functions, which are hard-wired in such a way that high-order only the correlation after corresponding to the priority colours are preserved.

In the example described, the background path merely colour codes duplicates the entering bv wav the OR function 501. It therefore does not make it possible to deal with the problem of the superposition of two different colours for the background. corresponds to a simplification which is justified by the fact that in the modes of display used hitherto this kind of conflict does not exist. For this problem to be dealt with in the future, it would be entirely possible to use, as for the stroke path, SUP functions to make it possible to manage the hierarchy between these colours. This hierarchy would itself be obtained with the aid of the colour codes as for the stroke path.

15

20

25

30

10

The action of the colour correlators is to thicken the theoretical track with a square profile of width equal to the width of the microregions, that is to say 4 subpixels in the exemplary embodiment described. To do this, two subpixels are processed simultaneously by injecting the respective coefficients of the associated microregions into the interlaced structure of the two channels correlators. οf the The processing synchronous, that is to say that at each clock edge the coefficients propagate from cell to cell so as to undergo the correlations. The D-type flip-flops are used to perform this propagation. The correlation with results of the correlations performed previous lines is performed at the level of the last cells of the correlators, which receive, via return paths originating from FIFO memories loaded with these previous results, the coefficients corresponding to these results.

35 The SUP/ECR function is a complex logic function which possesses 3 coefficient inputs, which will be denoted A, B and C, 2 control inputs, denoted E and ABC, and an output denoted S. It is carried out by the conventional means of combinatorial analysis, in such a way as to

15

20

perform the functions corresponding to the following truth table:

E	ABC	S	Comments		
1	1	С	C overwrites A and B		
1	2	В	B overwrites A and C		
1	4	A	A overwrites B and C		
0	3	sup(B,C)	retain the larger of B or C		
0	5	sup(A,C)	retain the larger of A or C		
0	6	sup(A,B)	retain the larger of A or B		
0	7	sup(A,B,C)	retain the largest of A, B or C		

This SUP/ECR function is used in the luminance correlator to combine luminous levels on the basis of the two control inputs which receive as drive signals those originating from the corresponding outputs of the SUP functions.

The SUP function is used in the chrominance correlator to combine colour codes.

It comprises three inputs intended for the coefficients, which will be denoted A, B and C, and three outputs, denoted S, E and ABC, intended to be connected to the corresponding inputs of the SUP/ECR functions described above. It too is carried out according to the conventional methods of combinatorial analysis so that the values of the outputs as a function of the values of the coefficients: input comply with the following truth table:

Luminance coeff.	E	ABC	S	Comments
A>B and C	1	4	A	overwriting by A
B>A and C	1	2	В	overwriting by B
C>A and B	1	1	С	overwriting by C
A=C>B	0	5	A	blend A and C
A=B>C	0	6	A	blend A and B
B=C>A	0	3	В	blend B and C
A=B=C	0	7	A	blend A, B and C

In the example described the complete correlator, represented in Figure 6, comprises four lines.

- As was explained above, to obtain the desired correlation the output of each line is reinjected onto the last stage of the previous line with the aid of FIFO type memory 601. Thus line 4 feeds line 3, line 3 line 2 and line 2 line 1.
- 10 The output of line 1 is therefore that of the correlator itself, which determines the luminance and the chrominance of the subpixels 1 and 2.
- For the luminance the value obtained has to be multiplied by a fixed factor so as to adapt it to the dynamic range of the display used. This is carried out in the mixer 604.
- For the chrominance on the other hand, since only colour codes are available, it is necessary to transform them into levels of intensity for each primary component, red, green and blue. These colour codes are therefore transformed in a stroke colour generator 602 on the one hand and a background colour generator 603 on the other hand into three colour levels, for each primary colour. The number of these levels as well as their distribution is adapted to the type of display used, according to a known method.
- When using a display of known QUAD type for example, with as in the exemplary embodiment described in this text, operation at subpixel level, each outgoing colour code is transformed into a single primary colour as a function of its position in the output stream. In this way different intensity levels can be assigned to each of the two green subpixels of the QUAD pixel.

Ultimately the outgoing data from the correlator corresponding to the luminance, to the stroke colour

10

15

20

25

and the background colour of the two pixels, are combined in a mixer 604 which makes it possible to construct the subpixels actually intended for display in the matrix display. It can carry out two distinct functions.

A first function consists in performing the luminance times chrominance product so as to obtain inside an object of specified colour the intensity profile of the colour required.

Thus, as represented in Figure 7, by taking for example a cross section through a stroke displayed with a specified colour, the colour information exhibits a rectangular shape 701 in this section, luminance a Gaussian shape 702. It will be noted that indeed this Gaussian shape which characteristic of the processing by microregions. The product of the luminance times the colour gives a coloured Gaussian-shaped section 703, which does indeed correspond to what is desired, that is to say a colour whose intensity rises progressively from the edges of stroke to its centre, subsequently falling symmetrically on the other side. This does correspond to the thickening of the stroke so as to make it more visible, with blurring on its edges making it possible among other things to erase the staircase effects.

The second function of the mixer consists in managing the inlaying of the image elements into the background, by performing an outlining function, in particular in the case cited above where it is necessary to display a colour tone on tone, by causing for example a white line to stand out against a white background.

To do this, as represented in Figure 8, the mixer performs the product of the background times the image. The background is represented here by a rectangle 801

which is slightly wider than the image element 802. The outlined image 803 is obtained, in which it is indeed seen that the image proper, which is of the same colour as the background, comprises a Gaussian-shaped profile which terminates in two black troughs which outline the image with respect to the remainder of the background, whose level may be substantially the same as that of the Gaussian.

- Since two subpixels are processed simultaneously, two identical and independent mixers which each operate in parallel will be used in the exemplary embodiment described here of the invention.
- Represented in Figure 9 is a schematic diagram of an exemplary embodiment of such a mixer.

The luminance information and stroke colour information are applied to linearizing circuits 901, intended to compensate for the nonlinear response of the matrix display, more particularly in the case of LCD type displays.

The product of these luminance data and stroke colour data is obtained via the function Min 902. This function ensures that only the smallest data of the two paths are retained. This ensures that the subpixel will be blanked out if it does not correspond to the colour required and ensures a correct luminance level as a function of the luminance profile of the level fixed by the primary colour.

The display is thus saturated so as always to have a very visible image.

The two items of information are then applied to a multiplexer 903 controlled by the output of the MIN circuit. It delivers the stroke luminance information

35

LT for a subpixel belonging to the ridge of the smoothed stroke.

The background colour information is likewise applied to a linearizing circuit which makes it possible to obtain the background luminance LF, for a pixel belonging to an element of the background.

Finally, an averaging circuit 904, which receives both

10 LT and LF, makes it possible to obtain an average
luminance between that of the background and that of
the stroke, for a pixel belonging to the superposition
between the stroke and the background.

These three values are applied to a multiplexer 905 15 which is controlled by a selector 906. For this purpose this selector, which operates according to the rules of combinatorial analysis, applies the rules following truth table, in which LS is the outgoing luminance level from the correlator,  $\alpha 1$  is a threshold 20 fixed as a function of the content of the table of filters used in such a way that the central pixels of the microregions have priority in display so that the stroke may always be seen, and  $\alpha 2$  is a threshold fixed 25 in such a way that the inlaying of a stroke on a low level background preserves an optimal smoothing level so as to be able to preserve the profile of the stroke:

LS	Background Lum.	MUX	Pixel
=0	LF	0	LF
≥α1	X	2	LT
X	<α2	2	LT
$>0$ and $<\alpha 1$	≥α2	1	average (LT,LF)


30


Finally a computation function 907 makes it possible to obtain a threshold value intended for use by external circuits to allow optimal inlaying of the synthetic


image thus processed into a video image originating from an outside source.

#### CLAIMS

- 1. System for processing data for display on a matrix screen, of the type comprising a symbol generator (101) connected to an image memory (103) itself connected to a correlator (105) making it possible to implement a processing based on microregions so as to generate the final image to be displayed on a matrix screen (102), characterized in that the image memory (103) is organized so as to be able to read n pixels in parallel and in that the correlator (105) is organized so as to process these n pixels in parallel.
- System according to Claim 1, characterized in that 15 2. into is divided the correlator two parts (303, 304) making it possible to process the luminance and the chrominance separately so as to make it possible to perform a hierarchical 20 processing of the colours.
- 3. System according to either of Claims 1 and 2, characterized in that it comprises (305, 306) for separately processing the colour of the strokes and the colour of the background, and 25 a mixer (307) for making it possible to outline elements of scenery displayed background in tone on tone mode.
- 30 4. System according to any one of Claims 1 to 3, characterized in that the correlator is organized in m substantially identical parallel lines making it possible for the m pixels of one of the axes of the microregions used to be processed in parallel.

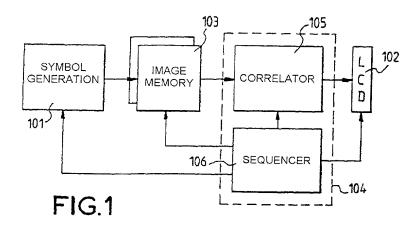



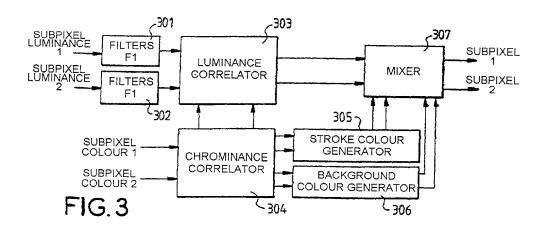

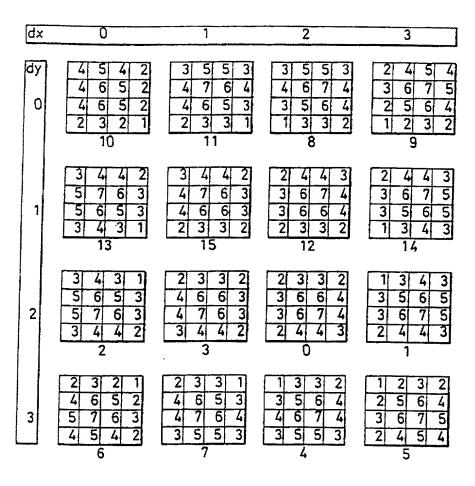
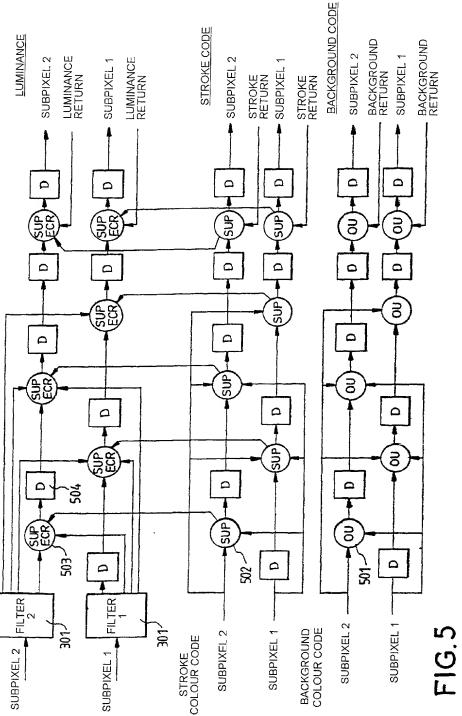
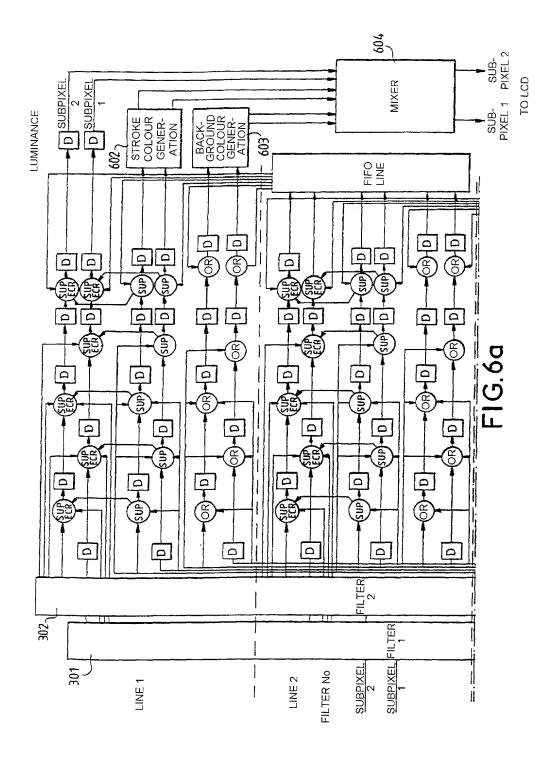
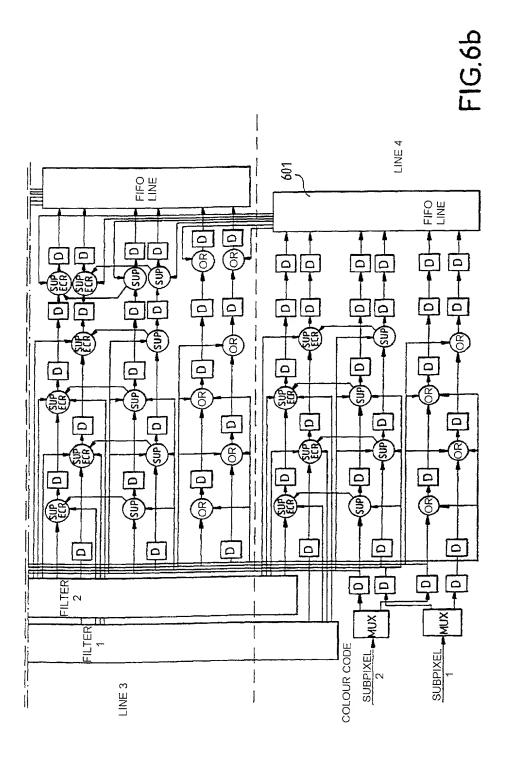


FIG.4












FIG.7





FIG.8

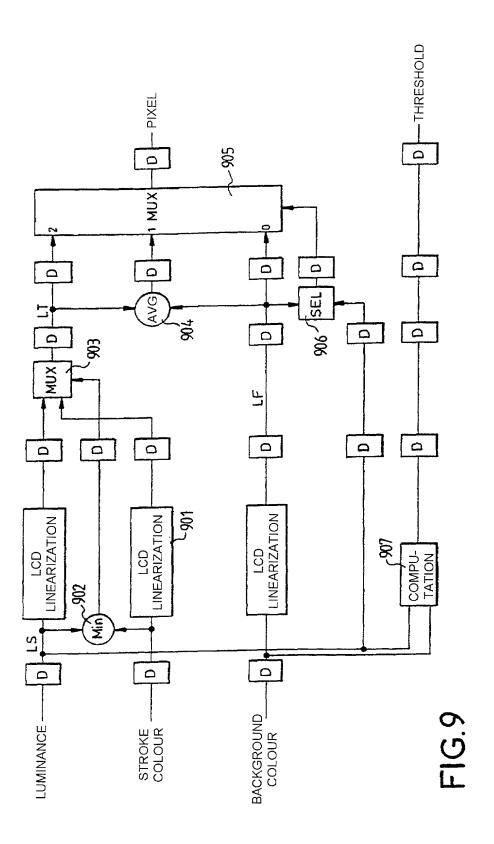

# Declaration and Power of Attorney for Patent Application Déclaration et Pouvoirs pour Demande de Brevet

# French Language Declaration

En tant l'inventeur nommé ci-après, je déclare par le présent acte que:	As a below named inventor, I hereby declare that.
Mon domicile, mon adresse postale et ma nationalité sont ceux figurant ci-dessous à côté de mon nom.	My residence, post office address and citizenship are as stated next to my name.
Je crois être le premier inventeur original et unique (si un seul nom est mentionné ci-dessous), ou l'un des premiers co-inventeurs originaux (si plusieurs noms sont mentionnés ci-dessous) de l'objet revendiqué, pour lequel une demande de brevet a été déposée concernant l'invention intitulée	I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled
	SYSTEM FOR PROCESSING DATA FOR
pre <sub>de</sub> production of the control o	DISPLAY ON A MATRIX SCREEN
et dont la description est fournie ci-joint à moins	the specification of which:
ार्ष ci-joint	□ is attached hereto.
a été déposée le	was filed on May 5, 2000
sous le numéro de demande des Etats-Unis ou le numéro de demande international PCT	as United States Application Number or PCT International Application Number
et modifiée le	PCT/FR00/01232 and was amended on
(le cas échéant).	(if applicable).
Je déclare par le présent acte avoir passé en revue et compris le contenu de la description ci-dessus, revendications comprises, telles que modifiées par toute modification dont il aura été fait référence ci-dessus.	I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.
Je reconnais devoir divulguer toute information pertinente à la brevetabilité, comme défini dans le Titre 37, § 1.56 du Code fédéral des réglementations.	I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

## French Language Declaration

Je revendique par le présent acte avoir la priorité étrangère, en vertu du Titre 35, § 119(a)-(d) ou § 365(b) du Code des Etats-Unis, sur toute demande étrangère de brevet ou certificat d'inventeur ou, en vertu du Titre 35, § 365(a) du même Code, sur toute demande internationale PCT désignant au moins un pays autre que les Etats-Unis et figurant ci-dessous et, en cochant la case, j'ai aussi indiqué ci-dessous toute demande étrangère de brevet, tout certificat d'inventeur ou toute demande internationale PCT ayant une date de dépôt précédant celle de la demande à propos de laquelle une priorité est revendiquée

volontairement fausses risquent de compromettre la validité de la

demande de brevet ou du brevet délivré à partir de celle-ci

I hereby claim foreign priority under Title 35, United States Code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the light of Cotton lead below and have also identified below by United States, listed below, and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed

Prior Foreign Applic Demande(s) de bre	eation(s) vet anterieure(s) dans	s un autre pays		<u>Priority c</u> <u>Droit de r</u> <u>revend</u>	<u>oriorité</u>
99 06000 (Number) (Numéro)	FRANCI (Country) (Pays)	<u> </u>	11 MAY 1999 (Day/Month/Year Filed) (Jour/Mois/Anné de dépôt)	X Yes Oui	□ No Non
(Number) (Numéro)	(Country) (Pays)		(Day/Month/Year Filed) (Jour/Mois/Anné de dépôt)	Yes Oui	No Non
35, § 119(e) du C brevet provisoire ef	ode des Etats-Unis	énefice, en vertu du Titre , de toute demande de is et figurant ci-dessous	I hereby claim the benefit under T § 119(e) of any United States pro below	itle 35, United States visional application(s	s Code, s) listed
(Application (Nº de der	n No.) nande)	(Filing Date) (Date de dépôt)	(Application No.) (Nº de demande)	(Filing Dat (Date de dé	te) pôt)
Je revendique par le 35, § 120 du Code effectuée aux Etats même Code, de tou Etats-Unis et figurar chacune des reven pas divulgué dan Internationale PCT, egraphe du Titre 35, edvoir divulguer tor comme défini dans réglementations, do	des Etats-Unis, de to E-Unis, ou en vertu of te demande internation to ci-dessous et, dans dications de cette des la demande ante en vertu des dispose § 112 du Code des ute information pertis le Titre 37, § 156 nt j'ai pu disposer er eure et la date de	énéfice, en vertu du Titre pute demande de brevet du Titre 35. § 365(c) du onale PCT désignant les si la mesure où l'objet de emande de brevet n'est érieure américaine ou sitions du premier para-Etats-Unis, je reconnais nente à la brevetabilité, 6 du Code fédéral des atre la date de dépôt de dépôt de la demande sente demande.	I hereby claim the benefit under T § 120 of any United States application International application designation below and, insofar as the subject methics application is not disclosed in the International application in the maparagraph of Title 35, United States the duty to disclose information which as defined in Title 37, Code of Feder became available between the filing and the national or PCT International controls.	on(s), or § 365(c) of a ng the United States after of each of the cla is prior United States anner provided by the Code, § 112, I acknow the Date and Regulations, § 1.56 date of the prior apport	Iny PCT s, listed laims of or PCT the first wledge ntability 6 which
PCT/FR00/0 (Application (№ de dem	11232 1 No.) lande)	MAY 5, 2000 (Filing Date) (Date de dépôt)	(Status) (patented, pending, abandor (Statut) (breveté, en cours d'examen	ned) , abandonné)	
(Application (Nº de dem		(Filing Date) (Date de dépôt)	(Status) (patented, pending, abandor (Statut) (breveté, en cours d'examen	ned) , abandonné)	
est, à ma connaiss formulée à partir de tenue pour véridique été formulées en sac ou son équivalent incarcération, ou des	sance, véridique et e renseignements c r, et de plus, que tou chant que toute fauss est passible d'un s deux, en vertu de l	e déclaration ci-incluse que toute déclaration ou de suppositions est tes ces déclarations ont se déclaration volontaire le amende ou d'une a Section 1001 du Titre de telles déclarations	I hereby declare that all statement knowledge are true and that all state and belief are believed to be true statements were made with the kind statements and the like so made imprisonment, or both, under Sect United States Code and that such injeopardize the validity of the application.	is made herein of manents made on informer; and further that nowledge that willful are punishable by it ion 1001 of Title 18 willful false statement	mation these il false fine or of the

thereon

## **French Language Declaration**

POUVOIRS: En tant que l'inventeur cité, je désigne par la présente l'(les) avocat(s) et/ou agent(s) suivant(s) pour qu'ils poursuive(nt) la procédure de cette demande de brevet et traite(nt) toute affaire s'y rapportant avec l'Office des brevets et des marquees. (mentionner le nom et le numéro d'enregistrement)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Norman F. Oblon, Reg. No. 24,618; Marvin J. Spivak, Reg. No. 24,913; C. Irvin McClelland, Reg. No. 21,124; Gregory J. Maier, Reg. No. 25,599; Arthur I. Neustadt, Reg. No. 24,854; Richard D. Kelly, Reg. No. 27,757; James D. Hamilton, Reg. No. 28,421; Eckhard H. Kuesters, Reg. No. 28,870; Robert T. Pous, Reg. No. 29,099; Charles L. Gholz, Reg. No. 26,395; William E. Beaumont, Reg. No. 30,996; Jean-Paul Lavalleye, Reg. No. 31,451; Stephen G. Baxter, Reg. No. 32,884; Richard L. Treanor, Reg. No. 36,379; Steven P. Weihrouch, Reg. No. 32,829; John T. Goolkasian, Reg. No. 26,142; Richard L. Chinn, Reg. No. 34,305, Steven E. Lipman, Reg. No. 30,011; Carl E. Schlier, Reg. No. 34,426; James J. Kulbaski, Reg. No. 34,648; Richard A. Neifeld, Reg. No. 35,299; J. Derek Mason, Reg. No. 35,270; Surinder Sachar, Reg. No. 34,423; Christina M. Gadiano, Reg. No. 37,628; Jeffrey B. McIntyre, Reg. No. 36,867; William T. Enos, Reg. No. 33,128; Michael E. McCabe, Jr., Reg. No. 37,182; Bradley D. Lytle, Reg. No. 40,073; and Michael R. Casey, Reg. No. 40,294, with full powers of substitution and revocation.

Addresser	tauta	00***		~ ^ À
Addresser	TOUTE	COLLECT	าดกลวก	CD 2

Send Correspondence to:

OBLON, SPIVAK, McClelland, Maier & Neustadt, P.C. FOURTH FLOOR 1755 JEFFERSON DAVIS HIGHWAY

ARLINGTON, VIRGINIA 22202 USA

Adresser tout appel téléphonique à. (nom et numéro de téléphone)

init. ini.

Direct Telephone calls to (name and telephone number)

(703) 413-3000

	0000	13
Nom complete de l'unique ou premier inventeur	Full name of sole or first inventor  Jean-Jacques FAVOT  October 22, 200	01
Signature de l'inventeur Date	Inventor's signature Date  Jeon -Jacques FAvor	€
Domicile	Residence 33127 MARTIGNAS EN JALLES FRANC	E
Nationalité	Citizenship French	
Adresse Postale	Post Office Address 13, allée des Grives	
	33127 MARTIGNAS EN JALLES FRANCI	E
Nom complete du second co-inventeur, le cas echeant	Full name of second joint inventor, if any Jean-Christophe ABADIE October 22, 2	2001
Signature de l'inventeur Date	Second inventor's signature  Tean - Unistake Abadie	e
Domicile	Residence 33380 BIGANOS FRANC	CE
Nationalité	Citizenship French	
Adresse Postale	Post Office Address 86; rue Georges Clémenceau	
	33380 BIGANOS FRANC	E

(Fournier les mêmes renseignements et la signature de tout co-inventeur supplémentaire )

(Supply similar information and signature for third and subsequent joint inventors)